




Sun-Tek Manufacturing, Inc.
 10303 General Drive
 Orlando, FL 32824
 407 / 859-2117
 www.sun-tek.com
 customerservice@sun-tek.com

MODEL MD-CMA

Extreme Weather Series

INSTALLATION INSTRUCTIONS

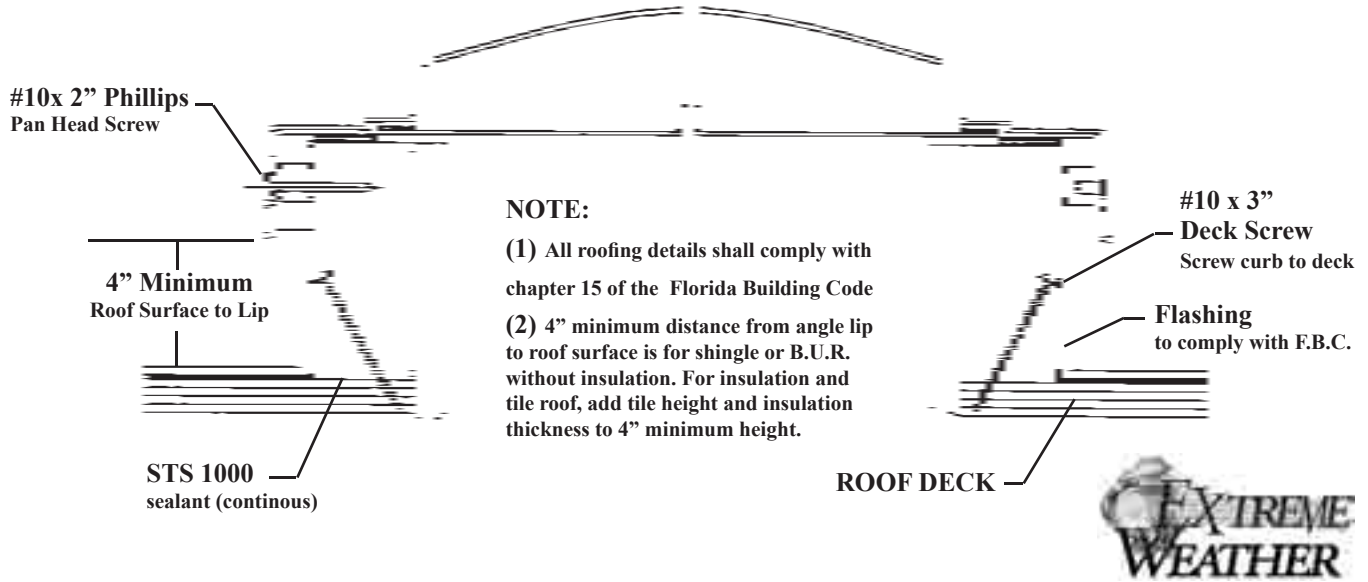

FAILURE TO FOLLOW RECOMMENDED INSTALLATION PROCEDURES MAY VOID WARRANTY

1 Cut rough opening:

To properly position skylight between trusses/rafters, locate the roof opening from the underside of the decking. Drill holes or drive nails to mark corners. (If this area is not accessible, locate the ceiling joists from inside the house, mark and cut opening in ceiling, then mark roof opening.)

2 Before cutting roof opening, check measurements against size chart. Snap a chalkline from corner to corner, or draw line with a straightedge, then cut roof opening.

3 Remove shingles 6 - 8" out from roof opening.

4 Build curb as shown. This is the tested/approved method. Flash curb to comply with Florida Building Code.

5 Shingle roof up to bottom of curb.

6 Shingle up sides and across the top.

SIZE CHART

Size Code	Roof Opening	Curb Outside Dimension	Deck Screw	
			Long Side	Short Side
1414	14-1/2" x 14-1/2"	17-1/2" x 17-1/2"	2	2
1422	14-1/2" x 22-1/2"	17-1/2" x 45-1/2"	3	3
1430	14-1/2" x 30-1/2"	17-1/2" x 33-1/2"	3	3
1446	14-1/2" x 46-1/2"	17-1/2" x 49-1/2"	4	3
1919	19-1/2" x 19-1/2"	22-1/2" x 22-1/2"	3	3
2222	22-1/2" x 22-1/2"	25-1/2" x 25-1/2"	3	3
2230	22-1/2" x 30-1/2"	25-1/2" x 33-1/2"	3	3
2236	22-1/2" x 36-1/2"	25-1/2" x 39-1/2"	4	3
2246	22-1/2" x 46-1/2"	25-1/2" x 49-1/2"	4	3

You will need:

hammer	sealant/mastic
keyhole saw	tape measure
skill saw	chalkline or straight edge
nails	trowel or caulk gun
drill	utility knife
2 x 6's	

RECOMMENDED SEALANTS:

- Non-hardening roof cement
- Butyl rubber sealant/caulk
- STS 1000

- 7** Apply a 1/2" wide bead of caulking on top of the curb around the entire perimeter. Sealant applied too close to the opening may "ooze" into the opening.
- 8** Set the skylight over the opening with the 'THIS EDGE DOWN' label at the bottom of the opening. Set skylight into the sealant making sure the skylight is down evenly on the top of the curb. Attach

the skylight to the curb using the #12 x 2" Phillips pan head screws provided. Fasteners must be perpendicular to curb. Every installation hole must have a fastener.

- 9** Interior Finishing: Run drywall (or other finishing material) up the inside face of the curb.

EXTREME WEATHER/DURA SKYLIGHT LIMITED WARRANTY

Sun-Tek Manufacturing, Inc. ("Sun Tek") 10303 General Drive, Orlando, Florida 32824, (407) 859-2117, warrants this Skylight on the following terms and conditions: **A. Warranty Coverage:** This warranty applies to both the original purchaser and first consumer-owner of a Skylight made by Sun-Tek. **B. Warranty Duration:** This warranty shall remain in effect for a period of five (5) years on Model SF and ten (10) years on all other Dura-Series models after the date the Skylight is purchased or the date the skylight is delivered to the first consumer-owner, whichever is later. One (1) year on electric components.

C. Warranty Application: This warranty applies only to the materials and fabrication of the Skylight and does not apply to any defect or damage caused by improper use, improper installation, improper care, shipping damage or accident. This warranty does not cover any cosmetic changes in skylight, including but not limited to pitting, hazing, paint finish, discoloration. **D. Performance by Sun-Tek:** During the warranty period, Sun-Tek will provide free of charge an equivalent new skylight (or component thereof) for one found to be defective in material or workmanship. Shipping costs of such replacements are not the responsibility of Sun-Tek. Sun-Tek will not be responsible for any costs of removal or re-installation. **E. Validation Procedure:** To obtain performance under this warranty, the purchaser must: **(1) On installed skylights, contact Sun-Tek for instructions before removing skylight. Removal of skylight from roof before inspection will void warranty.** (2) Notify Sun-Tek in writing of any claim within thirty (30) days after the defect is discovered; (3) Sun-Tek or its authorized agents must examine the skylight and determine to its satisfaction whether the defect is covered by this warranty; and (4) Present a copy of the receipt as proof of purchase. **F. Implied Warranties:** IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, SHALL NOT EXTEND BEYOND THE DURATION OF THE EXPRESS WARRANTIES PROVIDED HEREIN. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. **G. Incidental or Consequential Damages:** SUN-TEK SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOSS OF TIME OR REVENUE, DAMAGE RESULTING TO OTHER PROPERTY OR OTHER EXPENSES. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. **H. Exclusive Warranty:** THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES. This warranty gives you specific legal rights. You may have other rights which vary from state to state.

